

VAF

INSTRUMENTS



ProFlow

Sliding Vane Meters DN 15-50 (1/2"-2")

142

Product Bulletin

WWW.VAF.NL

TO BE
REALLY
SURE

Introduction

VAF Instruments ProFlow positive displacement sliding vane type liquid flowmeters are used in continuous metering applications of oil-like liquids, especially for accurate measurement of fuel oil consumption. ProFlow flowmeters have a simple, rugged design. With only few almost frictionless moving internal parts there is hardly any wear in the flowmeter which safeguards a typical long lasting lifetime. ProFlow meters have no mechanical seals saving you from regular maintenance and possible leakage of process liquids into the environment. The flowmeter is driven by the process liquid which makes it suitable for distant locations without power supply. The high accuracy of the flowmeter (down to 0.2% and repeatability 0.05%) is not influenced by process pressure or temperature, mechanical pipe strain or liquid turbulence and therefore straight inlet and outlet pipe pieces are not required.

Experience in flow measurement

In 1938 VAF Instruments started as a manufacturer of petrol delivery pumps. The flowmeters made by VAF for this pump already had to have the highest accuracy and had to meet the demands of the board of weights and measures. Innovation and research over the past 70 years helped VAF to make new types of flowmeters bearing in mind customer requirements and the need for accurate flow measurement. VAF Instruments flowmeters are available in sizes from 8 mm up to 300 mm (1 l/hr up to 960 m³/hr). ProFlow flowmeters cover the middle part of this range.

Available ProFlow flowmeters

ProFlow flowmeters are available in connection sizes from 15 mm up to 50 mm representing maximum flow ranges from 50 l/min up to 500 l/min. For registration of the measured amount of liquid VAF ProFlow meters can be fitted with non resettable counters and pulse transmitters.

Liquids

ProFlow flowmeters are specially developed for measurement of all kinds of hydrocarbon liquids, in particular medium and heavy fuel oils for combustion engines, lubricating oils and many other oil-like liquids.

Special versions

This brochure comprises only VAF Instruments standard delivery program. Special flowmeter executions can be offered as tailor-made solutions.

Consult VAF Instruments for further information.

Principle of operation

ProFlow flowmeters operate on the sliding vane principle. The meter consists of a specially shaped housing in which a rotor can rotate freely. Two pairs of vanes are placed into four slots in the rotor. Each pair is positioned by a rod and can move in and out of the rotor. The radial vane movement is guided by the special inner shape of the housing. This patented construction provides a constant seal between the inlet and the outlet of the meter.

The incoming liquid forces the rotor to rotate. A magnetic coupling transmits the rotor rotations from the measuring chamber to a built-on counter (standard). An electric pulse transmitter can be installed as option for remote totalising or flow data processing.

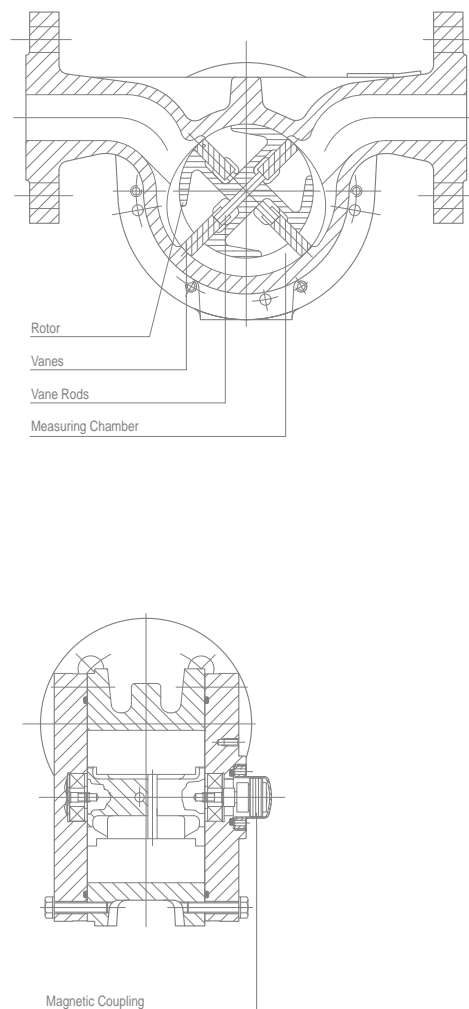


Fig. 1 Sectional view

Features & benefits


Features	Benefits
High capacity and rangeability	One meter for a wide range of flows
	Lower investment
High accuracy (down to $\pm 0.2\%$)	Exact registration of transferred amount of liquid
	No loss of valuable raw material
Design simplicity	Easy to service
	No complex replacement parts
	Low operation cost
Accuracy not degraded by: process pressure / process temperature / liquid viscosity / liquid conductivity / pipe strain / flow pattern (turbulence)	Easy to operate because no need for external settings saving time in operation and training
	One single meter model is suitable for different liquids resulting in a lower investment
	No straight pipe required before or behind meter thus and less space required
Compact design	Easy to integrate in compact systems
	Space saving
Constructed to CE standards	No special adjustments necessary
ISO 9001 registered company	Assured product quality
Few internal parts	Less wear
	Long lifetime
	Low operation cost
Measurement driven by liquid	No auxillary power needed
	Suitable for many remote locations
Local and/or remote registration with standard counters and Ex pulse transmitters	Standard flowmeter suitable for hazardous areas



Technical specification

Typical calibration curves

VAF Instruments flowmeters perform liquid measurement with the highest accuracy. This graph shows typical calibration curves for liquids with different viscosities. Consult the factory for other values.

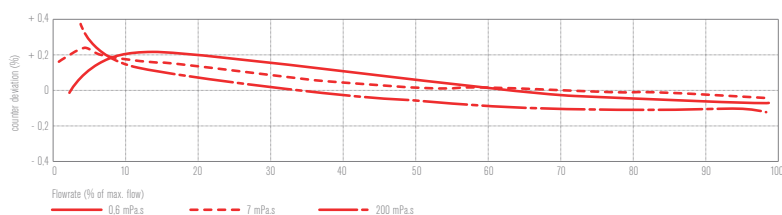


Basic model number	B5015	B5023	B5025	B5040	B5050
Connection size, DN [mm]	15 mm (1/2")	25 mm (1")	25 mm (1")	40 mm (1.5")	50 mm (2")
Capacity [l/min]	see graphs				
Maximum, 8 hrs/day discontinuous	50	50	160	250	500
Maximum, continuous	37.5	37.5	120	187.5	375
Displaced volume per revolution [litre]	0.025	0.025	0.167	0.167	0.40
Measuring accuracy					
range 1:10 ¹	0.2 %				
range 1:20 ²	0.3 %				
Repeatability	better than ± 0.05 %				
Required starting pressure [kPa (bar)]	3 (0.03)				
Materials body, flanges, covers and rotor	ductile iron				
Vanes	carbon				
O-rings	viton A				
Body pressure rating [kPa (bar)]	4000 (40)		2500 (25)		2000 (20)
Available flanges					
DIN PN (bar) raised face or with groove acc. DIN 2512N	6, 10, 16, 25, 40		6, 10, 16, 25		
ANSI RF	150, 300		150, 300		
JIS K	5, 10, 16, 20		5, 10, 16, 20		
Liquid temperature range standard	-15°C to 125°C				-15°C to 125°C
On application	-15°C to 180°C				-15°C to 160°C
Built-on counter	6 digit non-resettable totaliser				
smallest readout unit					
red pointer	0.1 litre, 0.001 m ³		0.001 m ³		0.001 m ³
counter	1 litre, 0.01 m ³		0.01 m ³		0.01 m ³
Optional inductive pulse transmitter	1 or 2 per flowmeter				
protection class	DIN 19234 (NAMUR), Ex II 2G Ex ia IIC T6..T3				
Calibrated pulses per litre in combination with counter	0.1, 0.5, 1, 5, 10, 40, 50, 80, 100, 200, 400, 800, 1000		0.1, 0.5, 1, 6, 12, 30, 60, 120, 150, 300		0.1, 0.5, 1, 2.5, 5, 10, 12.5, 25, 50, 62.5
With pulse box only	40, 80, 200, 400, 800, 1000, 2000		6, 12, 30, 60, 120, 150, 300		2.5, 5, 12.5, 25, 50, 62.5, 125
Weight without counter [Kg]	5	7	12	14	22

Notes: ¹ Standard factory calibration. ² Calibration on request.


Flow ranges

To select the appropriate meter size for your process the graphs must be used. The data in these graphs only refer to standard flowmeters used on Newtonian liquids. Consult VAF Instruments for viscosities higher than shown in the graphs. Lower minimum capacities are possible dependent on liquid viscosity and required measuring accuracy.

Flowrate - pressure drop viscosity relation

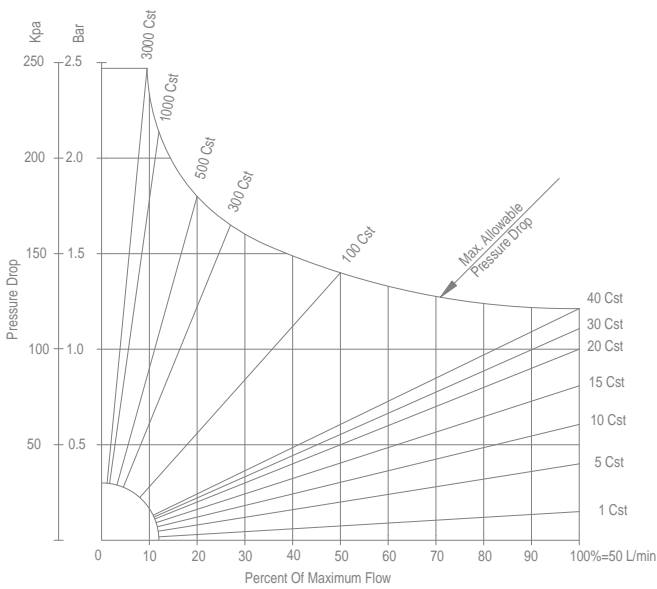


Models B5015 / B5023: 100% = 50 l/min

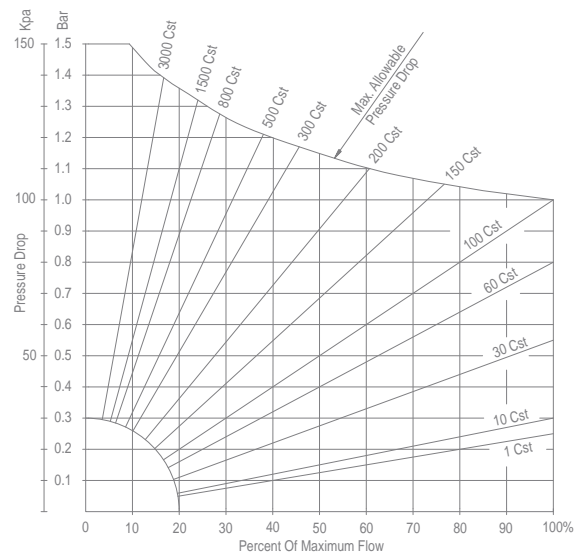

Model B5025: 100% = 160 l/min

Model B5040: 100% = 250 l/min

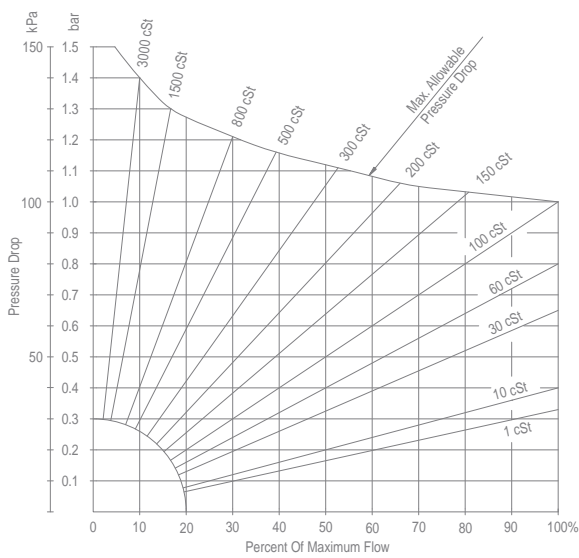

Model B5050: 100% = 500 l/min



Options and accessories

Liquid filter

The process liquid must be clean and free from air, gas or dirt. Solid particles may cause excessive wear. It is recommended to install a liquid filter with a suitable mesh width. If necessary also install an air vent.

Electronic signal processing instrumentation

A complete range of electronic signal processing instrumentation is available.

Built-on Totaliser and Pulse box

ProFlow flowmeters can be equipped with a built-on totaliser or a pulse box. See tables for counter reading units and combinations of totaliser and pulse transmitter. A pulse transmitter box is a non-indicating box which is built directly onto the flowmeter, and holds the inductive transmitter(s) according to Namur with optional pulse discriminator.

Consult VAF Instruments for special counters and pulse transmitters not mentioned in this brochure.



Fig. 2 Totaliser



Fig. 3 Pulse box

Applications


- Fuel consumption measurement of internal combustion engines and oil burners;
- Injection of oils;
- Measurement of fluid movement in hydraulic systems;
- Accurate measurement of viscous fluids at low flow rates.

Dimensions


Flange dimensions apply to flowmeters with DIN PN 10 flanges.

Dimensions of flowmeters with other pressure ratings are available on application.

All dimensions are in millimeters.

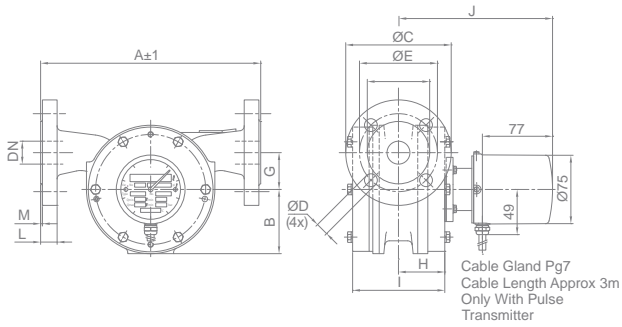

Meter type	Connection size	A	B	C	D	E	F	G	H	I	J	L	M
B5015	DN 15 mm (1/2")	180	50	95	14	65	45	24	33	70	151	16	2
B5023	DN 25 mm (1")	220	50	115	14	85	68	24	33	70	151	18	2
B5025	DN 25 mm (1")	240	70	115	14	85	68	40	51	101	168	18	2
B5040	DN 40 mm (1.5")	240	70	153	18	110	88	40	51	101	168	21	3
B5050	DN 50 mm (2")	260	85	165	18	125	102	50	72	143	189	22	3

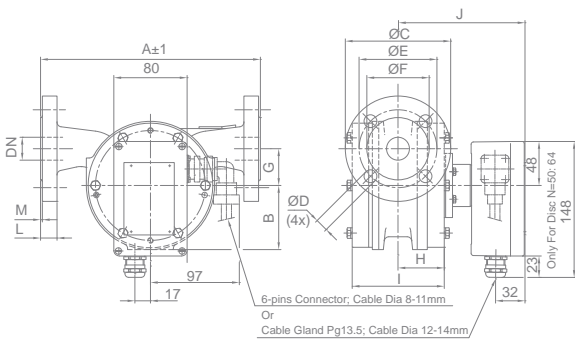

Meter type	Connection size	A	B	C	D	E	F	G	H	I	J	L	M
B5015	DN 15 mm (1/2")	180	50	95	14	65	45	24	33	70	121	16	2
B5023	DN 25 mm (1")	220	50	115	14	85	68	24	33	70	121	18	2
B5025	DN 25 mm (1")	240	70	115	14	85	68	40	51	101	139	18	2
B5040	DN 40 mm (1.5")	240	70	153	18	110	88	40	51	101	139	21	3
B5050	DN 50 mm (2")	260	85	165	18	125	102	50	72	143	160	22	3

